

# Model 3138-N 17" Powered Unwind



3138-N 17" Powered Unwind

Printer Applicator

# Powered Unwind

# Model 3138-N 17"

The Label-Aire® **Model 3138-N Printer Applicator** makes print-and-apply labeling easier...the 17" (432 mm) Powered Unwind configuration helps to significantly reduce downtime making your business even more profitable.


The 3138-N 17" Powered Unwind printer applicator is every bit as advanced a workhorse as the standard 3138-N and has all the same key features. Advanced features include automatic setup with multiple programmable label pages for easy change-overs to labels of different sizes, rate compensation for improved label placement accuracy, and advanced user-configurable I/O connectivity. All these handy features greatly simplify setup and change-overs. Like all 3138 models, the 3138-N 17" Powered Unwind is just as tough as it is versatile and advanced. The increased roll capacity of the large 17" (432 mm) powered unwind is perfect for high-speed, heavy duty operation. The 3138-N's rugged stainless steel and anodized aluminum construction is corrosion resistant providing long-lasting durability and maintenance-free operation in the most hostile environments. Like all Label-Aire printer applicators, the 3138-N 17" Powered Unwind is compatible with any O.E.M. printer on the market.

Put this advanced workhorse printer applicator to work for you all day, every day. The Model 3138-N 17" Powered Unwind Printer Applicator is built to meticulous quality standards and designed to operate reliably under the most intense conditions.

3138-N 17" Powered Unwind <small>Advanced Features</small>	
<b>17" (432 mm) powered unwind</b>	Geared for high-speed, heavy duty operation.
<b>Automatic setup</b>	Includes multiple programmable label pages for easy change-overs to different label sizes.
<b>Digital display</b>	Remote operator control capability.
<b>Flash memory</b>	Allows easy download of system software updates.
<b>Rate compensation (with optional encoder)</b>	For improved label placement accuracy.
<b>Advanced I/O</b>	User-configurable for system output.
<b>Heavy duty air cylinder</b>	For 24/7 label application.
<b>PLC outputs</b>	User-configurable for system output.
<b>3-color light stack</b>	Warns of "end of label/ribbon" and "low ribbon". "Low label" is available.

barcode labeling, data collection, distribution, inventory control, product I.D., retail, shipping, supply chain management, warehouse

# Powered Unwind

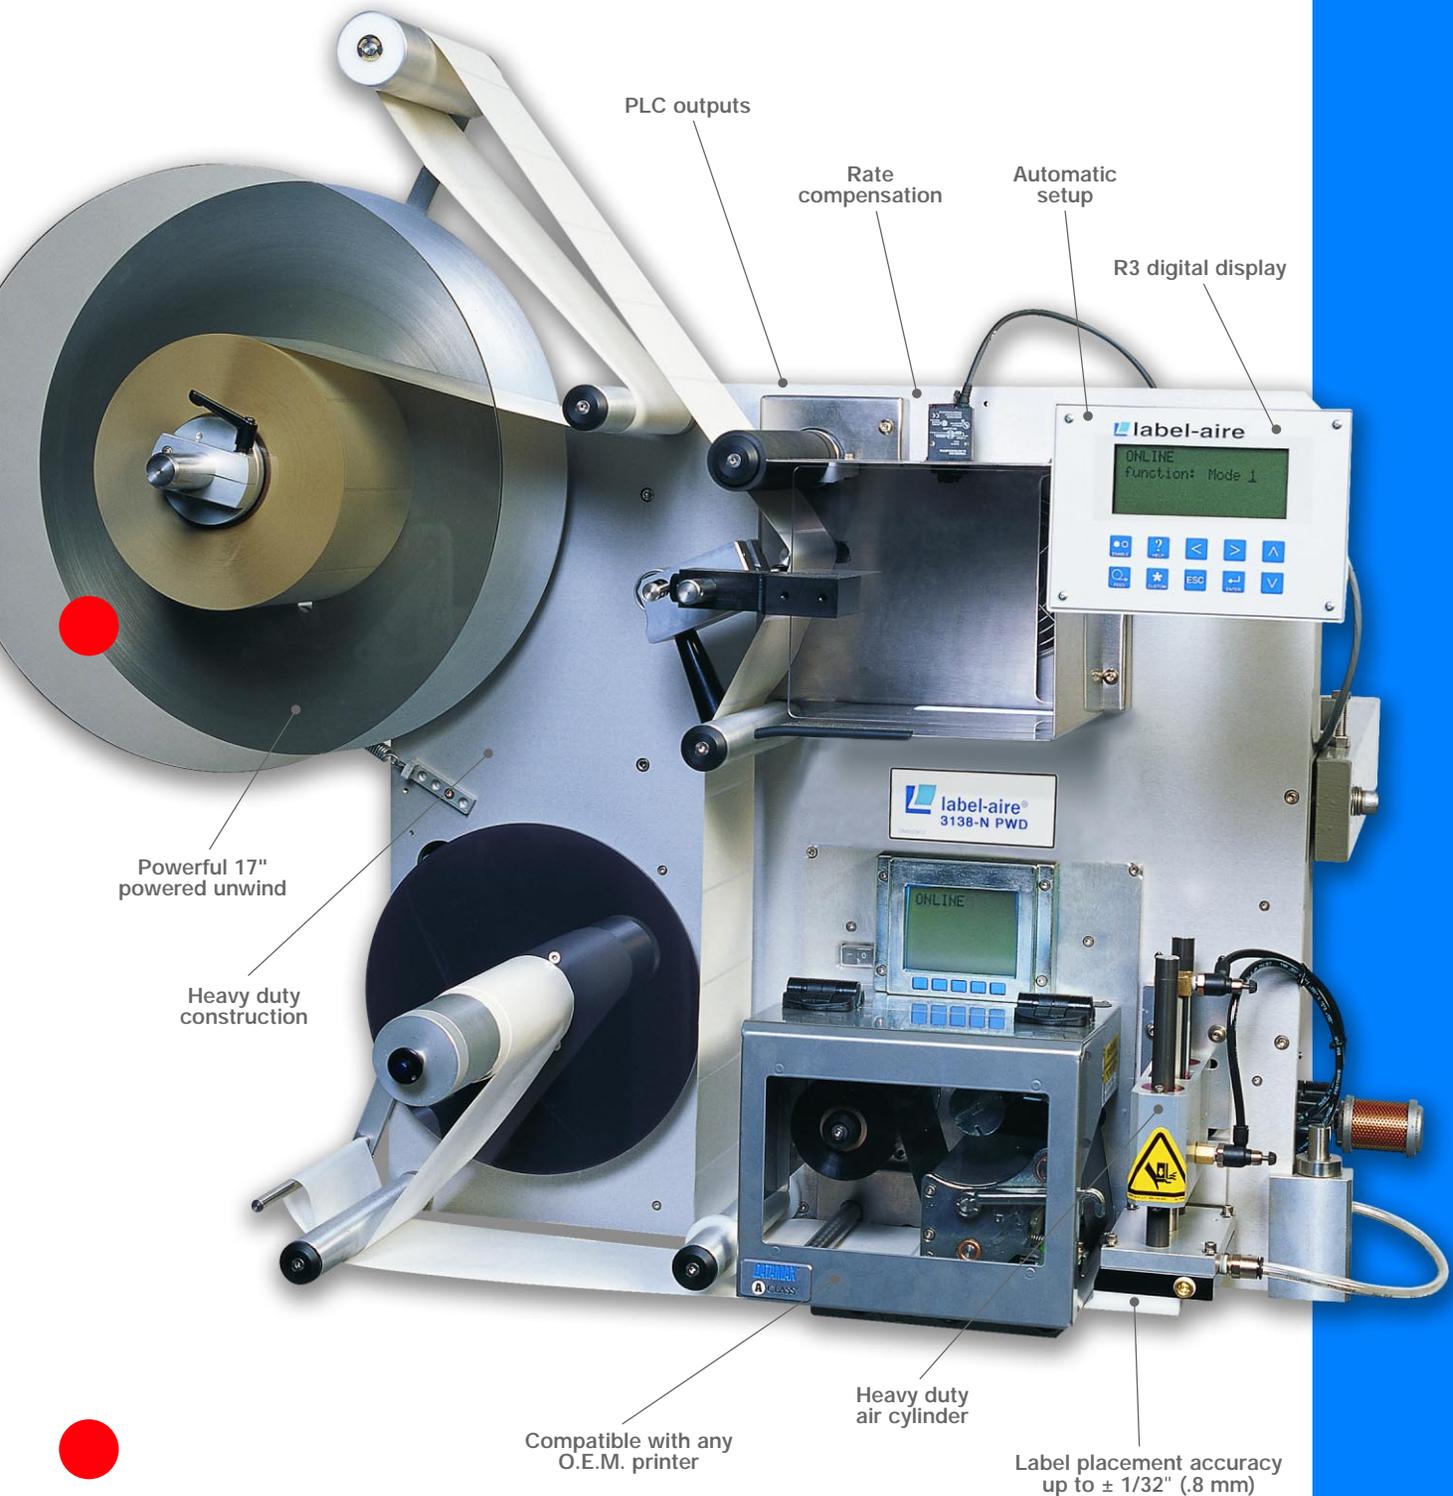

PLC outputs

Rate compensation

Automatic setup

R3 digital display

Powerful 17" powered unwind

Heavy duty construction

Compatible with any O.E.M. printer

Heavy duty air cylinder

Label placement accuracy up to  $\pm 1/32"$  (.8 mm)

Model 3138-N 17" Powered Unwind Printer Applicator

[www.label-air.com](http://www.label-air.com)

**label-air**  
labeling made easy

# 3138-N 17" Powered Unwind Printer Applicator Specifications

## Dimensions:

Height: 33.8" (859 mm)  
Length: 39.9" (1013 mm)  
Width: 24.2" (615 mm)

## Weight:

Approx. 190 lbs. (86 kg)

## Standard Label Dimensions:

Label Width: Up to 7.2" (183 mm)  
Label Length: Up to 7" (178 mm)  
(Printer dependent)

## Dispense Speed:

Up to 12" (305 mm) per second  
depending on printer and label size

## Label Placement Accuracy:

+/- 1/32" (.8 mm)

## Electrical:

115 Volts AC 60 Hz 5 Amps.  
220 Volts AC 50 Hz 5 Amps.

## Air:


4 cfm at 90 psi for most applications

## Options:

All O.E.M. print engines  
Label on pad detection  
Dual Action Tamp (DAT) configuration\*  
90° swing tamp

**Consult factory for additional options.**

\*Consult factory for availability.

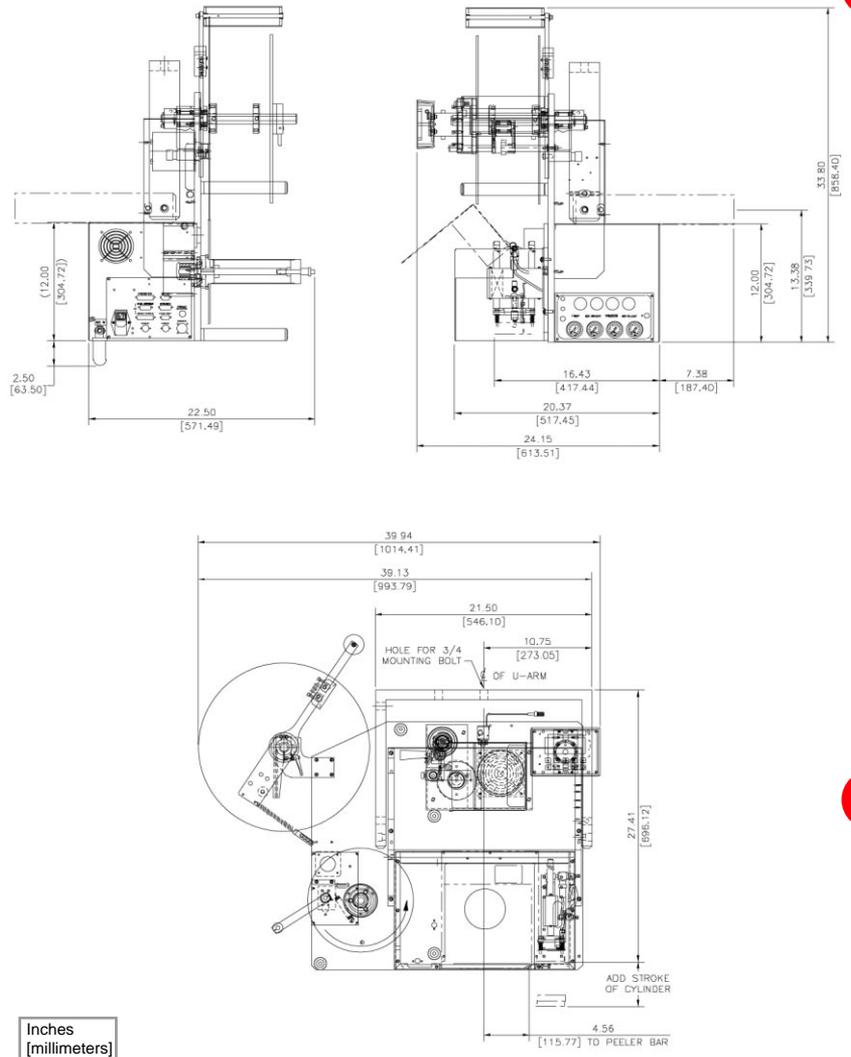

Distributed by:



**Headquarters**  
550 Burning Tree Road  
Fullerton, CA 92833 USA

o 714.441.0700  
f 714.526.0300  
e info@label-air.com  
w www.label-air.com

**Europe**  
Sjaellandsvej 27A  
DK-9500 Hobro, Denmark

o +45 9657 0063  
f +45 9657 0064  
e info@label-air-as.com  
w www.label-air-as.com